


The RAIN CATCHER RC connects to a single vertical, rainwater downspout and can divert precipitation for storage in a barrel or tank. The diverter requires minimal maintenance and separates leaves, moss, insects and other coarse materials directly through the downspout to the drain. The housing is made of UV-resistant polypropylene and has a maximum flow rate of about 65 GPM. It is suitable for a roof area of up to 1,600 square feet.

Below are the dimensions and the specifications for the Rain Catcher RC:

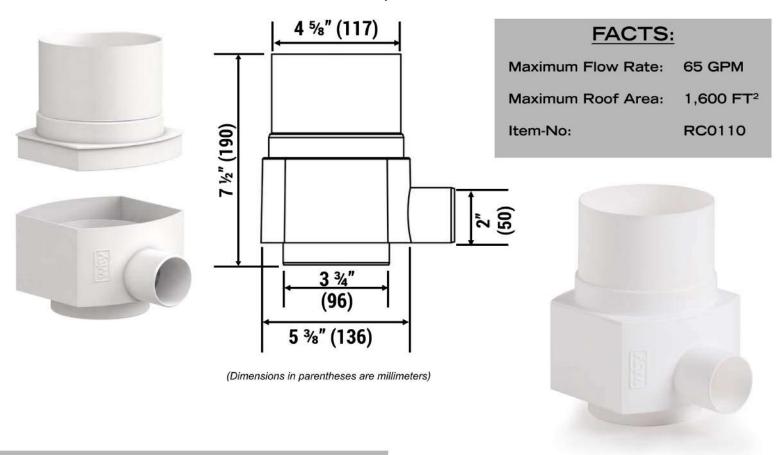

Regularly Furnished:

 UV-Resistant Polypropylene Housing (includes: Casing Cap, Casing)

Additional Components Available:

- 2" x 3" or 3" x 4" Downspout Kit
- 1" Flexible Hose with 2" Connection for Downspout Filter Mounting Kit

Installation Note:

- Must be mounted plumb and level
- Direct installation of 90° elbow or optional 1" flexible hose (with 2" connection) on 2" outlet
- Roof area above 1,600 ft² requires multiple Rain Catcher RC or use of larger capacity filter

Rainwater Management Solutions 2550 Shenandoah Ave NW Roanoke, VA 24017