



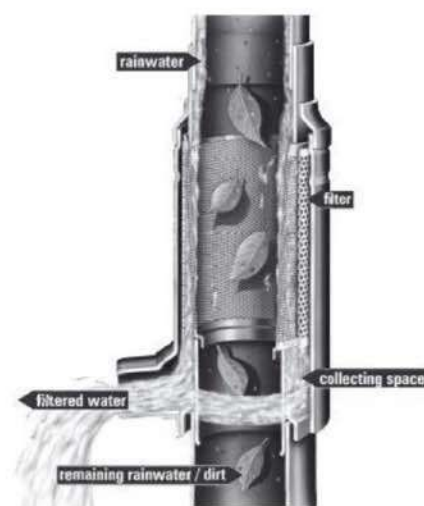

The Garden Downspout Filter connects to a single vertical rainwater downspout and can filter up to a 850-1,000 square foot roof area for irrigation, car washing or other non-potable uses. The downspout filter is installed above grade in the vertical rainwater downspout to remove debris to the storm system and divert 95% of the clean rainwater to the storage tank or rain barrel. The filter also operates as a first flush device. This filter should only be used with round downspouts or with a downspout adapter—also available through RMS.

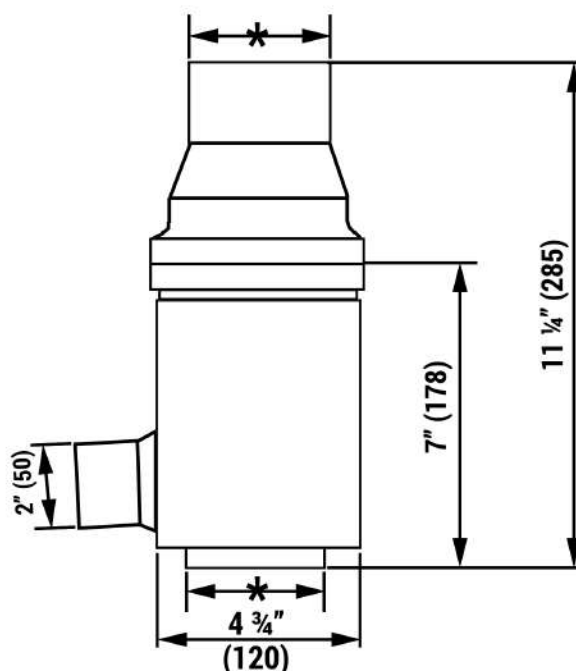

\* The garden filter is available in a variety of sizes to fit metal downspouts with internal diameters of 3" (76), 3 1/8" (80), 3 1/2" (87) and 4 (100) or plastic downspouts with external diameter of 2 15/16" (75) or 4 1/3" (110).  
(Dimensions in parentheses are millimeters)

### Regularly Furnished:

- Stainless Steel Filter Housing,
- .017 inch Stainless Steel Mesh Filter,
- Downspout Converter Kit (specify):
  - 2" x 3" Downspout Kit
  - 3" x 4" Downspout Kit

### Additional Components Available:

- Blind Insert: Stainless steel insert used in place of the mesh filter to divert flow directly to the storm water system
- 1" Flexible Hose with 2" Connection for Downspout Filter
- Mounting Screw and Clip

### NOTES:

- Filter Collector must be mounted plumb for proper operation.
- A 90° elbow or optional 1" flexible hose (with 2" connection) must be installed directly on the 2" outlet to assure proper filtration.
- For a roof area greater than 1,000 square feet, garden filters should be added or a larger capacity filter used.

Rainwater Management Solutions  
2550 Shenandoah Ave NW  
Roanoke, VA 24017